


FSC-XA/XG系列/SIZE 5XD 歐標銑刀柄標準型內冷鎢鋼鑽頭

Milling tungsten steel drill bit shank

国标通用标准
规格区间: D3.0-D11.0
规格间距: 0.01mm

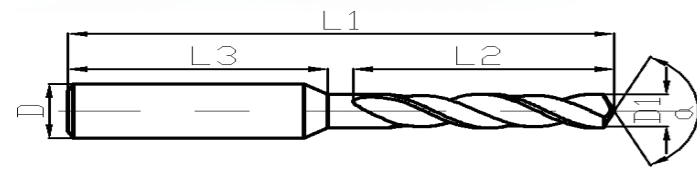

TISIALN 0.4 μm 30° 2Flutes HRC<55 SHANK h6

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FSC-XA/XG-300	3.00	28.0	66.0	4.0
FSC-XA/XG-310	3.10	28.0	66.0	4.0
FSC-XA/XG-320	3.20	28.0	66.0	4.0
FSC-XA/XG-330	3.30	28.0	66.0	4.0
FSC-XA/XG-340	3.40	28.0	66.0	4.0
FSC-XA/XG-350	3.50	28.0	66.0	4.0
FSC-XA/XG-360	3.60	28.0	66.0	4.0
FSC-XA/XG-370	3.70	28.0	66.0	4.0
FSC-XA/XG-380	3.80	36.0	74.0	4.0
FSC-XA/XG-390	3.90	36.0	74.0	4.0
FSC-XA/XG-400	4.00	36.0	74.0	4.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FSC-XA/XG-710	7.10	53.0	91.0	8.0
FSC-XA/XG-720	7.20	53.0	91.0	8.0
FSC-XA/XG-730	7.30	53.0	91.0	8.0
FSC-XA/XG-740	7.40	53.0	91.0	8.0
FSC-XA/XG-750	7.50	53.0	91.0	8.0
FSC-XA/XG-760	7.60	53.0	91.0	8.0
FSC-XA/XG-770	7.70	53.0	91.0	8.0
FSC-XA/XG-780	7.80	53.0	91.0	8.0
FSC-XA/XG-790	7.90	53.0	91.0	8.0
FSC-XA/XG-800	8.00	53.0	91.0	8.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FSC-XA/XG-410	4.10	36.0	74.0	6.0
FSC-XA/XG-420	4.20	36.0	74.0	6.0
FSC-XA/XG-430	4.30	36.0	74.0	6.0
FSC-XA/XG-440	4.40	36.0	74.0	6.0
FSC-XA/XG-450	4.50	36.0	74.0	6.0
FSC-XA/XG-460	4.60	36.0	74.0	6.0
FSC-XA/XG-470	4.70	44.0	82.0	6.0
FSC-XA/XG-480	4.80	44.0	82.0	6.0
FSC-XA/XG-490	4.90	44.0	82.0	6.0
FSC-XA/XG-500	5.00	44.0	82.0	6.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FSC-XA/XG-810	8.10	61.0	103.0	10.0
FSC-XA/XG-820	8.20	61.0	103.0	10.0
FSC-XA/XG-830	8.30	61.0	103.0	10.0
FSC-XA/XG-840	8.40	61.0	103.0	10.0
FSC-XA/XG-850	8.50	61.0	103.0	10.0
FSC-XA/XG-860	8.60	61.0	103.0	10.0
FSC-XA/XG-870	8.70	61.0	103.0	10.0
FSC-XA/XG-880	8.80	61.0	103.0	10.0
FSC-XA/XG-890	8.90	61.0	103.0	10.0
FSC-XA/XG-900	9.00	61.0	103.0	10.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FSC-XA/XG-510	5.10	44.0	82.0	6.0
FSC-XA/XG-520	5.20	44.0	82.0	6.0
FSC-XA/XG-530	5.30	44.0	82.0	6.0
FSC-XA/XG-540	5.40	44.0	82.0	6.0
FSC-XA/XG-550	5.50	44.0	82.0	6.0
FSC-XA/XG-560	5.60	44.0	82.0	6.0
FSC-XA/XG-570	5.70	44.0	82.0	6.0
FSC-XA/XG-580	5.80	44.0	82.0	6.0
FSC-XA/XG-590	5.90	44.0	82.0	6.0
FSC-XA/XG-600	6.00	44.0	82.0	6.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FSC-XA/XG-910	9.10	61.0	103.0	10.0
FSC-XA/XG-920	9.20	61.0	103.0	10.0
FSC-XA/XG-930	9.30	61.0	103.0	10.0
FSC-XA/XG-940	9.40	61.0	103.0	10.0
FSC-XA/XG-950	9.50	61.0	103.0	10.0
FSC-XA/XG-960	9.60	61.0	103.0	10.0
FSC-XA/XG-970	9.70	61.0	103.0	10.0
FSC-XA/XG-980	9.80	61.0	103.0	10.0
FSC-XA/XG-990	9.90	61.0	103.0	10.0
FSC-XA/XG-1000	10.00	61.0	103.0	10.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FSC-XA/XG-610	6.10	53.0	91.0	8.0
FSC-XA/XG-620	6.20	53.0	91.0	8.0
FSC-XA/XG-630	6.30	53.0	91.0	8.0
FSC-XA/XG-640	6.40	53.0	91.0	8.0
FSC-XA/XG-650	6.50	53.0	91.0	8.0
FSC-XA/XG-660	6.60	53.0	91.0	8.0
FSC-XA/XG-670	6.70	53.0	91.0	8.0
FSC-XA/XG-680	6.80	53.0	91.0	8.0
FSC-XA/XG-690	6.90	53.0	91.0	8.0
FSC-XA/XG-700	7.00	53.0	91.0	8.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FSC-XA/XG-1010	10.10	71.0	118.0	12.0
FSC-XA/XG-1020	10.20	71.0	118.0	12.0
FSC-XA/XG-1030	10.30	71.0	118.0	12.0
FSC-XA/XG-1040	10.40	71.0	118.0	12.0
FSC-XA/XG-1050	10.50	71.0	118.0	12.0
FSC-XA/XG-1060	10.60	71.0	118.0	12.0
FSC-XA/XG-1070	10.70	71.0	118.0	12.0
FSC-XA/XG-1080	10.80	71.0	118.0	12.0
FSC-XA/XG-1090	10.90	71.0	118.0	12.0
FSC-XA/XG-1100	11.00	71.0	118.0	12.0

◎ XA 適用切削材質: 鋁、有色金屬、非金屬類材料
◎ XG 適用切削材質: 中碳鋼、合金鋼、調質鋼、不銹鋼、模具鋼、其他鋼材、鑄鐵等
◎ XG 塗層刀具: 依照被加工材質不同塗層及顏色 (古銅色)

◎ XA Applicable materials: aluminum, non-ferrous metals, non-metallic. (Uncoated tools)
◎ XG-Applicable materials: carbon steel, alloy steel, quenched and tempered steel, sus, mold steel, other steel, ductile iron
◎ XG-Coated tools: the material to be processed in accordance with different coatings and colors (Tan)


◎ XA 適用切削材質: 鋁、有色金屬、非金屬類材料
◎ XG 適用切削材質: 中碳鋼、合金鋼、調質鋼、不銹鋼、模具鋼、其他鋼材、鑄鐵等
◎ XG 塗層刀具: 依照被加工材質不同塗層及顏色 (古銅色)

◎ XA Applicable materials: aluminum, non-ferrous metals, non-metallic. (Uncoated tools)
◎ XG-Applicable materials: carbon steel, alloy steel, quenched and tempered steel, sus, mold steel, other steel, ductile iron
◎ XG-Coated tools: the material to be processed in accordance with different coatings and colors (Tan)



FSC-XA/XG系列/SIZE 5XD 歐標銑刀柄標準型內冷鎢鋼鑽頭

Milling tungsten steel drill bit shank

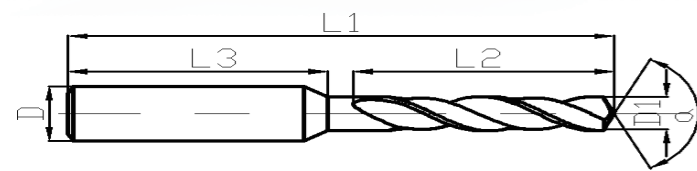

国标通用标准
规格区间: D11.0-D25.0
规格间距: 0.01mm

- TISIALN
- 0.4 μm
- 30°
- 2Flutes
- HRC < 55
- SHANK h6

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FSC-XA/XG-1110	11.10	71.0	118.0	12.0
FSC-XA/XG-1120	11.20	71.0	118.0	12.0
FSC-XA/XG-1130	11.30	71.0	118.0	12.0
FSC-XA/XG-1140	11.40	71.0	118.0	12.0
FSC-XA/XG-1150	11.50	71.0	118.0	12.0
FSC-XA/XG-1160	11.60	71.0	118.0	12.0
FSC-XA/XG-1170	11.70	71.0	118.0	12.0
FSC-XA/XG-1180	11.80	71.0	118.0	12.0
FSC-XA/XG-1190	11.90	71.0	118.0	12.0
FSC-XA/XG-1200	12.00	71.0	118.0	12.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FSC-XA/LG-1510	15.10	83.0	133.0	16.0
FSC-XA/LG-1520	15.20	83.0	133.0	16.0
FSC-XA/LG-1530	15.30	83.0	133.0	16.0
FSC-XA/LG-1540	15.40	83.0	133.0	16.0
FSC-XA/LG-1550	15.50	83.0	133.0	16.0
FSC-XA/LG-1560	15.60	83.0	133.0	16.0
FSC-XA/LG-1570	15.70	83.0	133.0	16.0
FSC-XA/LG-1580	15.80	83.0	133.0	16.0
FSC-XA/LG-1590	15.90	83.0	133.0	16.0
FSC-XA/LG-1600	16.00	83.0	133.0	16.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FSC-XA/XG-1210	12.10	77.0	124.0	14.0
FSC-XA/XG-1220	12.20	77.0	124.0	14.0
FSC-XA/XG-1230	12.30	77.0	124.0	14.0
FSC-XA/XG-1240	12.40	77.0	124.0	14.0
FSC-XA/XG-1250	12.50	77.0	124.0	14.0
FSC-XA/XG-1260	12.60	77.0	124.0	14.0
FSC-XA/XG-1270	12.70	77.0	124.0	14.0
FSC-XA/XG-1280	12.80	77.0	124.0	14.0
FSC-XA/XG-1290	12.90	77.0	124.0	14.0
FSC-XA/XG-1300	13.00	77.0	124.0	14.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FSC-XA/XG-1310	13.10	77.0	124.0	14.0
FSC-XA/XG-1320	13.20	77.0	124.0	14.0
FSC-XA/XG-1330	13.30	77.0	124.0	14.0
FSC-XA/XG-1340	13.40	77.0	124.0	14.0
FSC-XA/XG-1350	13.50	77.0	124.0	14.0
FSC-XA/XG-1360	13.60	77.0	124.0	14.0
FSC-XA/XG-1370	13.70	77.0	124.0	14.0
FSC-XA/XG-1380	13.80	77.0	124.0	14.0
FSC-XA/XG-1390	13.90	77.0	124.0	14.0
FSC-XA/XG-1400	14.00	77.0	124.0	14.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FSC-XA/XG-1410	14.10	83.0	133.0	16.0
FSC-XA/XG-1420	14.20	83.0	133.0	16.0
FSC-XA/XG-1430	14.30	83.0	133.0	16.0
FSC-XA/XG-1440	14.40	83.0	133.0	16.0
FSC-XA/XG-1450	14.50	83.0	133.0	16.0
FSC-XA/XG-1460	14.60	83.0	133.0	16.0
FSC-XA/XG-1470	14.70	83.0	133.0	16.0
FSC-XA/XG-1480	14.80	83.0	133.0	16.0
FSC-XA/XG-1490	14.90	83.0	133.0	16.0
FSC-XA/XG-1500	15.00	83.0	133.0	16.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FSC-XA/XG-1650	16.50	101.0	153.0	18.0
FSC-XA/XG-1680	16.80	101.0	153.0	18.0
FSC-XA/XG-1700	17.00	101.0	153.0	18.0
FSC-XA/XG-1750	17.50	101.0	153.0	18.0
FSC-XA/XG-1780	17.80	101.0	153.0	18.0
FSC-XA/XG-1800	18.00	101.0	153.0	18.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FSC-XA/XG-1850	18.50	101.0	153.0	20.0
FSC-XA/XG-1880	18.80	101.0	153.0	20.0
FSC-XA/XG-1900	19.00	101.0	153.0	20.0
FSC-XA/XG-1950	19.50	101.0	153.0	20.0
FSC-XA/XG-1980	19.80	101.0	153.0	20.0
FSC-XA/XG-2000	20.00	101.0	153.0	20.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
FSC-XA/XG-2050	20.50	135.0	200.0	22.0
FSC-XA/XG-2100	21.00	135.0	200.0	22.0
FSC-XA/XG-2150	21.50	135.0	200.0	22.0
FSC-XA/XG-2200	22.00	135.0	200.0	22.0
FSC-XA/XG-2250	22.50	140.0	200.0	24.0
FSC-XA/XG-2300	23.00	140.0	200.0	24.0
FSC-XA/XG-2350	23.50	140.0	200.0	24.0
FSC-XA/XG-2400	24.00	140.0	200.0	24.0
FSC-XA/XG-2450	24.50	140.0	200.0	25.0
FSC-XA/XG-2500	25.00	140.0	200.0	25.0

◎ XA 適用切削材質: 鋁、有色金屬、非金屬類材料
◎ XG 適用切削材質: 中碳鋼、合金鋼、調質鋼、不銹鋼、模具鋼、其他鋼材、鑄鐵等
◎ XG 塗層刀具: 依照被加工材質不同塗層及顏色 (古銅色)

◎ XA Applicable materials: aluminum, non-ferrous metals, non-metallic. (Uncoated tools)
◎ XG-Applicable materials: carbon steel, alloy steel, quenched and tempered steel, sus, mold steel, other steel, ductile iron
◎ XG-Coated tools: the material to be processed in accordance with different coatings and colors (Tan)

◎ XA 適用切削材質: 鋁、有色金屬、非金屬類材料
◎ XG 適用切削材質: 中碳鋼、合金鋼、調質鋼、不銹鋼、模具鋼、其他鋼材、鑄鐵等
◎ XG 塗層刀具: 依照被加工材質不同塗層及顏色 (古銅色)

◎ XA Applicable materials: aluminum, non-ferrous metals, non-metallic. (Uncoated tools)
◎ XG-Applicable materials: carbon steel, alloy steel, quenched and tempered steel, sus, mold steel, other steel, ductile iron
◎ XG-Coated tools: the material to be processed in accordance with different coatings and colors (Tan)