


XA

XG

HB-XA/XG系列/SIZE 5XD 國標銑刀柄鎢通用型鋼鑽頭

Milling tungsten steel drill bit shank

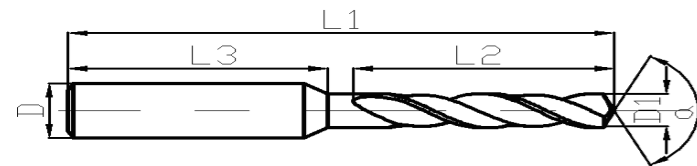

国标通用标准
规格区间: D0.2-D4.0
规格间距: 0.01mm



訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
HB-XA/XG-020	0.2	2.0	50.0	4.0
HB-XA/XG-030	0.3	4.0	50.0	4.0
HB-XA/XG-040	0.4	4.5	50.0	4.0
HB-XA/XG-050	0.5	5.0	50.0	4.0
HB-XA/XG-060	0.6	6.0	50.0	4.0
HB-XA/XG-070	0.7	6.0	50.0	4.0
HB-XA/XG-080	0.8	6.0	50.0	4.0
HB-XA/XG-090	0.9	6.0	50.0	4.0
HB-XA/XG-100	1.0	8.0	50.0	4.0
HB-XA/XG-110	1.1	8.0	50.0	4.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
HB-XA/XG-025	0.25	2.0	50.0	4.0
HB-XA/XG-035	0.35	4.0	50.0	4.0
HB-XA/XG-045	0.45	4.5	50.0	4.0
HB-XA/XG-055	0.55	5.0	50.0	4.0
HB-XA/XG-065	0.65	6.0	50.0	4.0
HB-XA/XG-075	0.75	6.0	50.0	4.0
HB-XA/XG-085	0.85	6.0	50.0	4.0
HB-XA/XG-095	0.95	6.0	50.0	4.0
HB-XA/XG-105	1.05	8.0	50.0	4.0
HB-XA/XG-115	1.15	8.0	50.0	4.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
HB-XA/XG-120	1.2	8.0	50.0	4.0
HB-XA/XG-130	1.3	8.0	50.0	4.0
HB-XA/XG-140	1.4	9.0	50.0	4.0
HB-XA/XG-150	1.5	9.0	50.0	4.0
HB-XA/XG-160	1.6	10.0	50.0	4.0
HB-XA/XG-170	1.7	10.0	50.0	4.0
HB-XA/XG-180	1.8	12.0	50.0	4.0
HB-XA/XG-190	1.9	12.0	50.0	4.0
HB-XA/XG-200	2.0	12.0	50.0	4.0
HB-XA/XG-210	2.1	12.0	50.0	4.0
HB-XA/XG-220	2.2	13.0	50.0	4.0
HB-XA/XG-230	2.3	13.0	50.0	4.0
HB-XA/XG-240	2.4	14.0	50.0	4.0
HB-XA/XG-250	2.5	14.0	50.0	4.0
HB-XA/XG-260	2.6	14.0	50.0	4.0
HB-XA/XG-270	2.7	16.0	50.0	4.0
HB-XA/XG-280	2.8	16.0	50.0	4.0
HB-XA/XG-290	2.9	16.0	50.0	4.0
HB-XA/XG-300	3.0	16.0	50.0	4.0
HB-XA/XG-310	3.1	20.0	52.0	4.0
HB-XA/XG-320	3.2	20.0	52.0	4.0
HB-XA/XG-330	3.3	20.0	52.0	4.0
HB-XA/XG-340	3.4	20.0	52.0	4.0
HB-XA/XG-350	3.5	20.0	52.0	4.0
HB-XA/XG-360	3.6	23.0	55.0	4.0
HB-XA/XG-370	3.7	23.0	55.0	4.0
HB-XA/XG-380	3.8	23.0	55.0	4.0
HB-XA/XG-390	3.9	23.0	55.0	4.0
HB-XA/XG-400	4.0	23.0	55.0	4.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
HB-XA/XG-125	1.25	8.0	50.0	4.0
HB-XA/XG-135	1.35	8.0	50.0	4.0
HB-XA/XG-145	1.45	9.0	50.0	4.0
HB-XA/XG-155	1.55	9.0	50.0	4.0
HB-XA/XG-165	1.65	10.0	50.0	4.0
HB-XA/XG-175	1.75	10.0	50.0	4.0
HB-XA/XG-185	1.85	12.0	50.0	4.0
HB-XA/XG-195	1.95	12.0	50.0	4.0
HB-XA/XG-205	2.05	12.0	50.0	4.0
HB-XA/XG-215	2.15	12.0	50.0	4.0
HB-XA/XG-225	2.25	13.0	50.0	4.0
HB-XA/XG-235	2.35	13.0	50.0	4.0
HB-XA/XG-245	2.45	14.0	50.0	4.0
HB-XA/XG-255	2.55	14.0	50.0	4.0
HB-XA/XG-265	2.65	14.0	50.0	4.0
HB-XA/XG-275	2.75	16.0	50.0	4.0
HB-XA/XG-285	2.85	16.0	50.0	4.0
HB-XA/XG-295	2.95	16.0	50.0	4.0
HB-XA/XG-305	3.05	20.0	52.0	4.0
HB-XA/XG-315	3.15	20.0	52.0	4.0
HB-XA/XG-325	3.25	20.0	52.0	4.0
HB-XA/XG-335	3.35	20.0	52.0	4.0
HB-XA/XG-345	3.45	20.0	52.0	4.0
HB-XA/XG-355	3.55	23.0	55.0	4.0
HB-XA/XG-365	3.65	23.0	55.0	4.0
HB-XA/XG-375	3.75	23.0	55.0	4.0
HB-XA/XG-385	3.85	23.0	55.0	4.0
HB-XA/XG-395	3.95	23.0	55.0	4.0

◎ XA 適用切削材質: 鋁、有色金屬、非金屬類材料
◎ XG 適用切削材質: 中碳鋼、合金鋼、調質鋼、不銹鋼、模具鋼、其他鋼材、鑄鐵等
◎ XG 塗層刀具: 依照被加工材質不同塗層及顏色

◎ XA Applicable materials: aluminum, non-ferrous metals, non-metallic. (Uncoated tools)
◎ XG Applicable materials: carbon steel, alloy steel, quenched and tempered steel, sus, mold steel, other steel, ductile iron
◎ Coated tools: the material to be processed in accordance with different coatings and colors

◎ XA 適用切削材質: 鋁、有色金屬、非金屬類材料
◎ XG 適用切削材質: 中碳鋼、合金鋼、調質鋼、不銹鋼、模具鋼、其他鋼材、鑄鐵等
◎ XG 塗層刀具: 依照被加工材質不同塗層及顏色

◎ XA Applicable materials: aluminum, non-ferrous metals, non-metallic. (Uncoated tools)
◎ XG Applicable materials: carbon steel, alloy steel, quenched and tempered steel, sus, mold steel, other steel, ductile iron
◎ Coated tools: the material to be processed in accordance with different coatings and colors




XA

XG

HB-XA/XG系列/SIZE 5XD 國標銑刀柄錫通用型鋼鑽頭

Milling tungsten steel drill bit shank

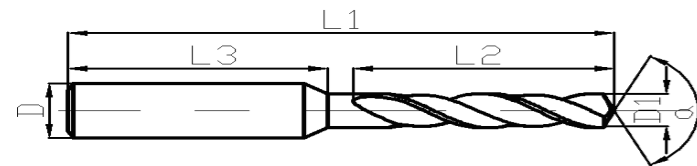

国标通用标准
规格区间: D4.05-D8.0
规格间距: 0.05mm

TISIALN 0.4 μm 30° 2Flutes HRC < 55 SHANK h6

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
HB-XA/XG-410	4.1	26.0	60.0	5.0
HB-XA/XG-420	4.2	26.0	60.0	5.0
HB-XA/XG-430	4.3	26.0	60.0	5.0
HB-XA/XG-440	4.4	26.0	60.0	5.0
HB-XA/XG-450	4.5	26.0	60.0	5.0
HB-XA/XG-460	4.6	28.0	60.0	5.0
HB-XA/XG-470	4.7	28.0	60.0	5.0
HB-XA/XG-480	4.8	28.0	60.0	5.0
HB-XA/XG-490	4.9	28.0	60.0	5.0
HB-XA/XG-500	5.0	28.0	60.0	5.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
HB-XA/XG-405	4.05	26.0	60.0	5.0
HB-XA/XG-415	4.15	26.0	60.0	5.0
HB-XA/XG-425	4.25	26.0	60.0	5.0
HB-XA/XG-435	4.35	26.0	60.0	5.0
HB-XA/XG-445	4.45	26.0	60.0	5.0
HB-XA/XG-455	4.55	26.0	60.0	5.0
HB-XA/XG-465	4.65	28.0	60.0	5.0
HB-XA/XG-475	4.75	28.0	60.0	5.0
HB-XA/XG-485	4.85	28.0	60.0	5.0
HB-XA/XG-495	4.95	28.0	60.0	5.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
HB-XA/XG-510	5.1	30.0	65.0	6.0
HB-XA/XG-520	5.2	30.0	65.0	6.0
HB-XA/XG-530	5.3	30.0	65.0	6.0
HB-XA/XG-540	5.4	30.0	65.0	6.0
HB-XA/XG-550	5.5	30.0	65.0	6.0
HB-XA/XG-560	5.6	32.0	65.0	6.0
HB-XA/XG-570	5.7	32.0	65.0	6.0
HB-XA/XG-580	5.8	32.0	65.0	6.0
HB-XA/XG-590	5.9	32.0	65.0	6.0
HB-XA/XG-600	6.0	32.0	65.0	6.0
HB-XA/XG-610	6.1	38.0	75.0	7.0
HB-XA/XG-620	6.2	38.0	75.0	7.0
HB-XA/XG-630	6.3	38.0	75.0	7.0
HB-XA/XG-640	6.4	38.0	75.0	7.0
HB-XA/XG-650	6.5	38.0	75.0	7.0
HB-XA/XG-660	6.6	42.0	80.0	7.0
HB-XA/XG-670	6.7	42.0	80.0	7.0
HB-XA/XG-680	6.8	42.0	80.0	7.0
HB-XA/XG-690	6.9	42.0	80.0	7.0
HB-XA/XG-700	7.0	42.0	80.0	7.0
HB-XA/XG-710	7.1	53.0	91.0	8.0
HB-XA/XG-720	7.2	53.0	91.0	8.0
HB-XA/XG-730	7.3	53.0	91.0	8.0
HB-XA/XG-740	7.4	53.0	91.0	8.0
HB-XA/XG-750	7.5	53.0	91.0	8.0
HB-XA/XG-760	7.6	53.0	91.0	8.0
HB-XA/XG-770	7.7	53.0	91.0	8.0
HB-XA/XG-780	7.8	53.0	91.0	8.0
HB-XA/XG-790	7.9	53.0	91.0	8.0
HB-XA/XG-800	8.0	53.0	91.0	8.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
HB-XA/XG-505	5.05	30.0	65.0	6.0
HB-XA/XG-515	5.15	30.0	65.0	6.0
HB-XA/XG-525	5.25	30.0	65.0	6.0
HB-XA/XG-535	5.35	30.0	65.0	6.0
HB-XA/XG-545	5.45	30.0	65.0	6.0
HB-XA/XG-555	5.55	30.0	65.0	6.0
HB-XA/XG-565	5.65	32.0	65.0	6.0
HB-XA/XG-575	5.75	32.0	65.0	6.0
HB-XA/XG-585	5.85	32.0	65.0	6.0
HB-XA/XG-595	5.95	32.0	65.0	6.0
HB-XA/XG-605	6.05	36.0	75.0	7.0
HB-XA/XG-615	6.15	36.0	75.0	7.0
HB-XA/XG-625	6.25	36.0	75.0	7.0
HB-XA/XG-635	6.35	36.0	75.0	7.0
HB-XA/XG-645	6.45	36.0	75.0	7.0
HB-XA/XG-655	6.55	42.0	80.0	7.0
HB-XA/XG-665	6.65	42.0	80.0	7.0
HB-XA/XG-675	6.75	42.0	80.0	7.0
HB-XA/XG-685	6.85	42.0	80.0	7.0
HB-XA/XG-695	6.95	42.0	80.0	7.0
HB-XA/XG-705	7.05	53.0	91.0	8.0
HB-XA/XG-715	7.15	53.0	91.0	8.0
HB-XA/XG-725	7.25	53.0	91.0	8.0
HB-XA/XG-735	7.35	53.0	91.0	8.0
HB-XA/XG-745	7.45	53.0	91.0	8.0
HB-XA/XG-755	7.55	53.0	91.0	8.0
HB-XA/XG-765	7.65	53.0	91.0	8.0
HB-XA/XG-775	7.75	53.0	91.0	8.0
HB-XA/XG-785	7.85	53.0	91.0	8.0
HB-XA/XG-795	7.95	53.0	91.0	8.0

◎ XA 適用切削材質: 鋁、有色金屬、非金屬類材料
◎ XG 適用切削材質: 中碳鋼、合金鋼、調質鋼、不銹鋼、模具鋼、其他鋼材、鑄鐵等
◎ XG 塗層刀具: 依照被加工材質不同塗層及顏色

◎ XA Applicable materials: aluminum, non-ferrous metals, non-metallic. (Uncoated tools)
◎ XG Applicable materials: carbon steel, alloy steel, quenched and tempered steel, sus, mold steel, other steel, ductile iron
◎ Coated tools: the material to be processed in accordance with different coatings and colors

◎ XA 適用切削材質: 鋁、有色金屬、非金屬類材料
◎ XG 適用切削材質: 中碳鋼、合金鋼、調質鋼、不銹鋼、模具鋼、其他鋼材、鑄鐵等
◎ XG 塗層刀具: 依照被加工材質不同塗層及顏色


◎ XA Applicable materials: aluminum, non-ferrous metals, non-metallic. (Uncoated tools)
◎ XG Applicable materials: carbon steel, alloy steel, quenched and tempered steel, sus, mold steel, other steel, ductile iron
◎ Coated tools: the material to be processed in accordance with different coatings and colors

XA

XG

HB-XA/XG系列/SIZE 5XD 國標銑刀柄錫通用型鋼鑽頭

Milling tungsten steel drill bit shank

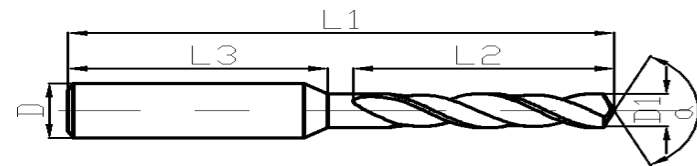

国标通用标准
规格区间: D8.05-D12.0
规格间距: 0.05mm



訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
HB-XA/XG-810	8.1	61.0	103.0	9.0
HB-XA/XG-820	8.2	61.0	103.0	9.0
HB-XA/XG-830	8.3	61.0	103.0	9.0
HB-XA/XG-840	8.4	61.0	103.0	9.0
HB-XA/XG-850	8.5	61.0	103.0	9.0
HB-XA/XG-860	8.6	61.0	103.0	9.0
HB-XA/XG-870	8.7	61.0	103.0	9.0
HB-XA/XG-880	8.8	61.0	103.0	9.0
HB-XA/XG-890	8.9	61.0	103.0	9.0
HB-XA/XG-900	9.0	61.0	103.0	9.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
HB-XA/XG-805	8.05	61.0	103.0	10.0
HB-XA/XG-815	8.15	61.0	103.0	10.0
HB-XA/XG-825	8.25	61.0	103.0	10.0
HB-XA/XG-835	8.35	61.0	103.0	10.0
HB-XA/XG-845	8.45	61.0	103.0	10.0
HB-XA/XG-855	8.55	61.0	103.0	10.0
HB-XA/XG-865	8.65	61.0	103.0	10.0
HB-XA/XG-875	8.75	61.0	103.0	10.0
HB-XA/XG-885	8.85	61.0	103.0	10.0
HB-XA/XG-895	8.95	61.0	103.0	10.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
HB-XA/XG-910	9.1	61.0	103.0	10.0
HB-XA/XG-920	9.2	61.0	103.0	10.0
HB-XA/XG-930	9.3	61.0	103.0	10.0
HB-XA/XG-940	9.4	61.0	103.0	10.0
HB-XA/XG-950	9.5	61.0	103.0	10.0
HB-XA/XG-960	9.6	61.0	103.0	10.0
HB-XA/XG-970	9.7	61.0	103.0	10.0
HB-XA/XG-980	9.8	61.0	103.0	10.0
HB-XA/XG-990	9.9	61.0	103.0	10.0
HB-XA/XG-1000	10.0	61.0	103.0	10.0
HB-XA/XG-1010	10.1	71.0	118.0	11.0
HB-XA/XG-1020	10.2	71.0	118.0	11.0
HB-XA/XG-1030	10.3	71.0	118.0	11.0
HB-XA/XG-1040	10.4	71.0	118.0	11.0
HB-XA/XG-1050	10.5	71.0	118.0	11.0
HB-XA/XG-1060	10.6	71.0	118.0	11.0
HB-XA/XG-1070	10.7	71.0	118.0	11.0
HB-XA/XG-1080	10.8	71.0	118.0	11.0
HB-XA/XG-1090	10.9	71.0	118.0	11.0
HB-XA/XG-1100	11.0	71.0	118.0	11.0
HB-XA/XG-1110	11.1	71.0	118.0	12.0
HB-XA/XG-1120	11.2	71.0	118.0	12.0
HB-XA/XG-1130	11.3	71.0	118.0	12.0
HB-XA/XG-1140	11.4	71.0	118.0	12.0
HB-XA/XG-1150	11.5	71.0	118.0	12.0
HB-XA/XG-1160	11.6	71.0	118.0	12.0
HB-XA/XG-1170	11.7	71.0	118.0	12.0
HB-XA/XG-1180	11.8	71.0	118.0	12.0
HB-XA/XG-1190	11.9	71.0	118.0	12.0
HB-XA/XG-1200	12.0	71.0	118.0	12.0

訂貨編號 Order NO.	直徑D1 Diameter	溝長L2 Channel length	全長L1 Full length	柄徑D Shank diameter
HB-XA/XG-905	9.05	61.0	103.0	10.0
HB-XA/XG-915	9.15	61.0	103.0	10.0
HB-XA/XG-925	9.25	61.0	103.0	10.0
HB-XA/XG-935	9.35	61.0	103.0	10.0
HB-XA/XG-945	9.45	61.0	103.0	10.0
HB-XA/XG-955	9.55	61.0	103.0	10.0
HB-XA/XG-965	9.65	61.0	103.0	10.0
HB-XA/XG-975	9.75	61.0	103.0	10.0
HB-XA/XG-985	9.85	61.0	103.0	10.0
HB-XA/XG-995	9.95	61.0	103.0	10.0
HB-XA/XG-1005	10.05	71.0	118.0	11.0
HB-XA/XG-1015	10.15	71.0	118.0	11.0
HB-XA/XG-1025	10.25	71.0	118.0	11.0
HB-XA/XG-1035	10.35	71.0	118.0	11.0
HB-XA/XG-1045	10.45	71.0	118.0	11.0
HB-XA/XG-1055	10.55	71.0	118.0	11.0
HB-XA/XG-1065	10.65	71.0	118.0	11.0
HB-XA/XG-1075	10.75	71.0	118.0	11.0
HB-XA/XG-1085	10.85	71.0	118.0	11.0
HB-XA/XG-1095	10.95	71.0	118.0	11.0
HB-XA/XG-1105	11.05	71.0	118.0	12.0
HB-XA/XG-1115	11.15	71.0	118.0	12.0
HB-XA/XG-1125	11.25	71.0	118.0	12.0
HB-XA/XG-1135	11.35	71.0	118.0	12.0
HB-XA/XG-1145	11.45	71.0	118.0	12.0
HB-XA/XG-1155	11.55	71.0	118.0	12.0
HB-XA/XG-1165	11.65	71.0	118.0	12.0
HB-XA/XG-1175	11.75	71.0	118.0	12.0
HB-XA/XG-1185	11.85	71.0	118.0	12.0
HB-XA/XG-1195	11.95	71.0	118.0	12.0

◎ XA 適用切削材質: 鋁、有色金屬、非金屬類材料
◎ XG 適用切削材質: 中碳鋼、合金鋼、調質鋼、不銹鋼、模具鋼、其他鋼材、鑄鐵等
◎ XG 塗層刀具: 依照被加工材質不同塗層及顏色

◎ XA Applicable materials: aluminum, non-ferrous metals, non-metallic. (Uncoated tools)
◎ XG Applicable materials: carbon steel, alloy steel, quenched and tempered steel, sus, mold steel, other steel, ductile iron
◎ Coated tools: the material to be processed in accordance with different coatings and colors

◎ XA 適用切削材質: 鋁、有色金屬、非金屬類材料
◎ XG 適用切削材質: 中碳鋼、合金鋼、調質鋼、不銹鋼、模具鋼、其他鋼材、鑄鐵等
◎ XG 塗層刀具: 依照被加工材質不同塗層及顏色

◎ XA Applicable materials: aluminum, non-ferrous metals, non-metallic. (Uncoated tools)
◎ XG Applicable materials: carbon steel, alloy steel, quenched and tempered steel, sus, mold steel, other steel, ductile iron
◎ Coated tools: the material to be processed in accordance with different coatings and colors